


```

.d8888b. 888      888      888
d88P Y88b 888      888      888
Y88b.    888      888      888
"Y888b. 888888 .d88b. 888d888 88888b. 888 8888b. 88888b.
"Y88b. 888 d8P Y8b 888P" 888 "88b 888 "88b 888 "88b
"888 888 88888888 888 888 888 888 .d888888 888 888
Y88b d88P Y88b. Y8b. 888 888 888 888 888 888 d88P d8b
"Y8888P" "Y888 "Y8888 888 888 888 888 "Y888888 88888P" Y8P


```

**Electronic Embroidery Kit
by Becky Stern**


For complete instructions, visit
<http://sternlab.org/ElectronicEmbroidery>

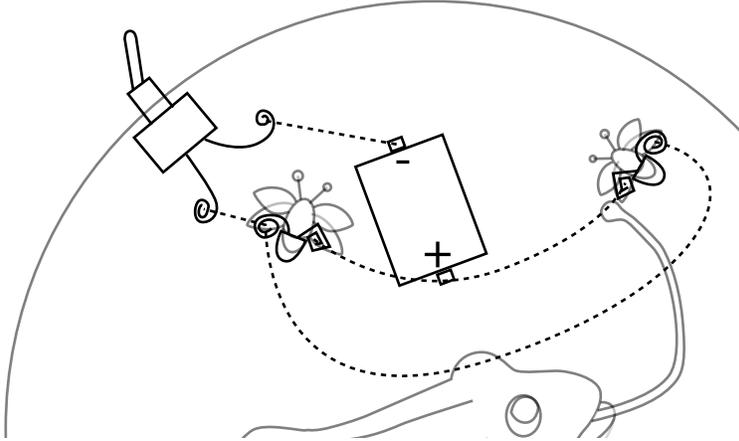

conductive thread circuit diagram

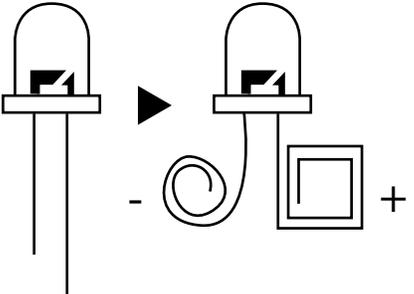

bend the leads of the LEDs like this

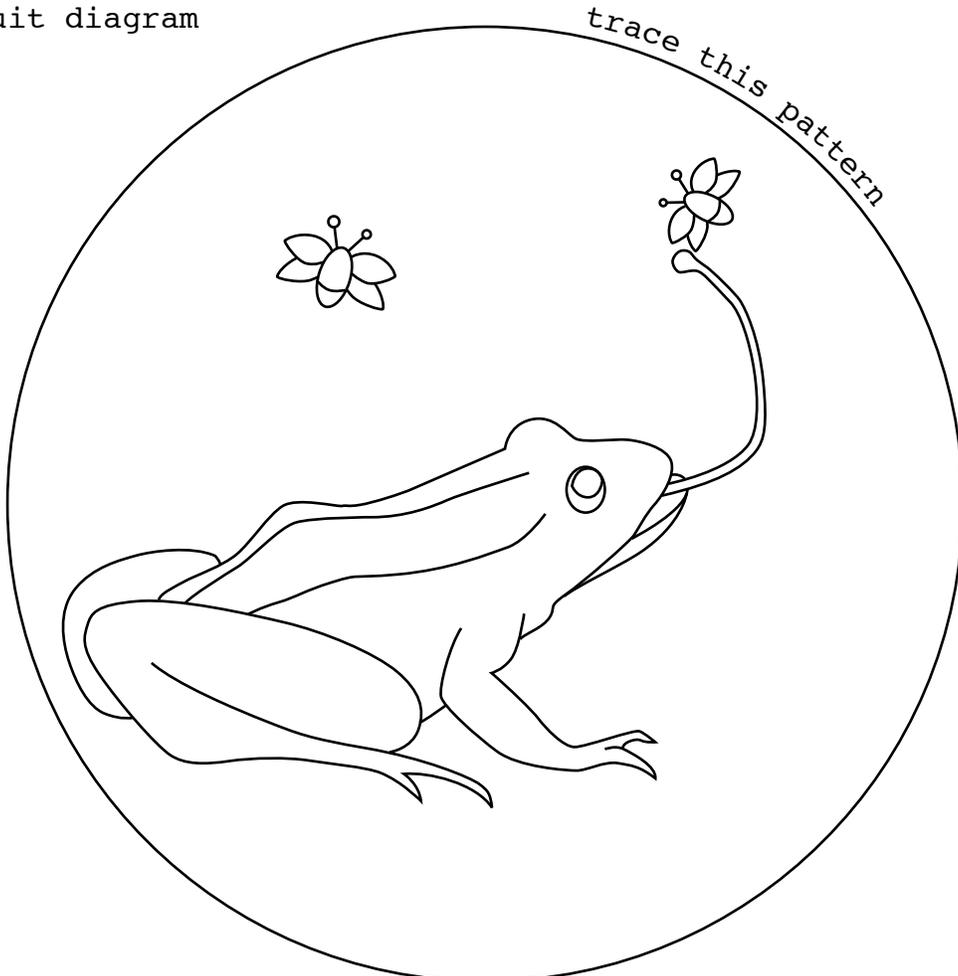

color separation:

green DMC 703

pink DMC 894

yellow DMC 743

black DMC 310

